


R0193

Espulsore esecuzione lunga
Long spring ejector

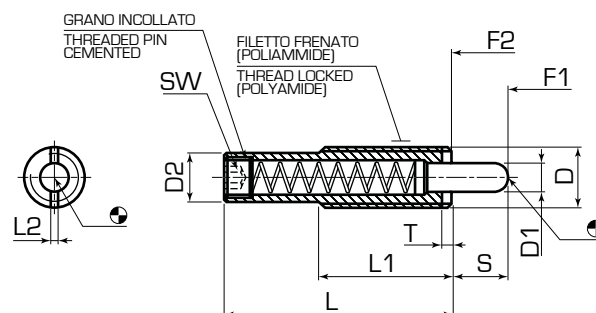

Descrizione:

Materiale:

Corpo: Acciaio automatico - brunito / Acciaio da bonifica - brunito

Sfera: Acciaio cementato temprato - brunito

Molla: Acciaio INOX

Nota: questi elementi sono usati come arresti, espulsori, smorzatori nella costruzione di stampi. Il montaggio avviene sia tramite l'esagono incassato sia tramite l'intaglio frontale. Sono disponibili gli appositi cacciaviti.

L'esecuzione in acciaio automatico con spinta maggiorata si distingue per il grano di chiusura non brunito.

Description:

Material:

Body: Free cutting steel - burnished / Quenched steel - burnished

Ball: Cemented hardened - burnished Steel

Spring: Stainless steel

Note: to be used for ejecting or for applying pressure or as an attenuation element. Spring plungers can be fixed and removed by internal hexagon or by front cutting. The appropriate screwdrivers are available.

Free cutting steel finish with increased spring load is characterized by a not burnished threaded pin.

Codice Code	Tipo Type	D	D1	D2	L	L1	L2	S	T	SW	Peso Weight (gr.)	F1 N≈ Spinta Spring load	F2 N≈ Spinta Spring load
R0193-02-0001	spinta normale / standard spring load	M10	4	7.8	35	25	1.5	8	1.4	3	15	6	16
R0193-02-0002		M12	5.5	9.5	43	35	2.7	10	2	4	23	4	18
R0193-02-0003		M16	8	13.4	48	35	3.2	10	3	6	42	7	24
R0193-02-0004		M16	8	13.4	58	35	3.2	10	3	6	53	15	42
R0193-02-0005		M16	8	13.4	58	35	3.2	15	3	6	55	9	33
R0193-02-0006		M16	8	13.4	58	35	3.2	20	3	6	57	4	23
R0193-02-0007		M16	8	13.4	83	35	3.2	20	3	6	71	11	43
R0193-02-0008		M16	8	13.4	98	35	3.2	25	3	6	78	13	41
R0193-02-0009		M16	8	13.4	98	35	3.2	30	3	6	80	13	47
R0193-02-0010		M16	8	13.4	118	35	3.2	30	3	6	95	24	110
R0193-02-0011		M16	8	13.4	148	35	3.2	40	3	6	123	13	63
R0193-02-0012		M16	8	13.4	148	35	3.2	50	3	6	127	7	43
R0193-02-0013	spinta maggiorata / increased spring load	M24	10	19.6	60	45	3.7	15	3	8	115	14	87
R0193-02-0014		M12	5.5	9.5	43	35	2.7	10	2	4	23	7	46
R0193-02-0015		M16	8	13.4	48	35	3.2	10	3	6	42	10	43
R0193-02-0016		M16	8	13.4	58	35	3.2	10	3	6	53	14	84
R0193-02-0017		M16	8	13.4	58	35	3.2	15	3	6	55	10	57
R0193-02-0018		M16	8	13.4	83	35	3.2	20	3	6	71	18	72
R0193-02-0019		M16	8	13.4	98	35	3.2	25	3	6	78	20	70
R0193-02-0020		M16	8	13.4	98	35	3.2	30	3	6	80	20	80
R0193-02-0021		M16	8	13.4	148	35	3.2	40	3	6	123	21	113
R0193-02-0022		M16	8	13.4	148	35	3.2	50	3	6	127	13	75
R0193-02-0023		M24	10	19.6	60	45	3.7	15	3	8	115	24	192

