



PC1500


Innesti rapidi standard Francese, intercambiabili con altri marchi con la stessa denominazione o profilo.

French standard quick coupling. Fully interchangeable with other brands with the same plug profile.

CARATTERISTICHE DI FUNZIONAMENTO – TECHNICAL FEATURES

Range di temperatura di esercizio:	-20\+100°C con O-Rings standard NBR. 160°C con O-Rings FKM (optional)
Pressione max. di esercizio:	10 Bar
Working temperature range:	-20\+100°C with NBR standard O-Rings. 160°C with FKM O-Rings (optional)
Max. working pressure:	10 Bar


Diametri e passaggio flusso:
Size and flow size:

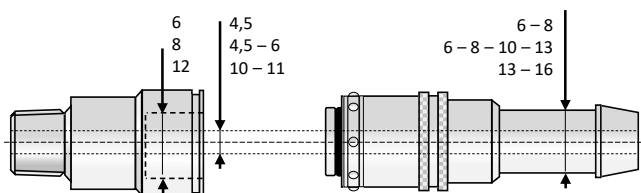

CARATTERISTICHE COSTRUTTIVE – CONSTRUCTION FEATURES


Corpo – Socket Body	Ottone nichelato – Brass
Ghiera – Sleeve	Acciaio Inox – Stainless Steel
Valvola – Valve	Ottone-Brass
Molle – Springs	Acciaio Inox – Stainless Steel
Sfere – Balls	Acciaio Inox – Stainless Steel
Nipplo – Nipple	Ottone – Brass
O-rings	NBR

OPTIONALS

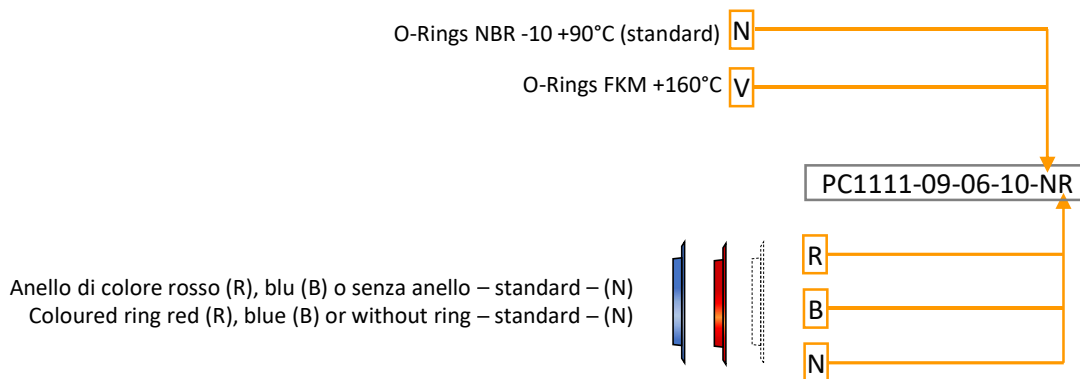

Costo extra per anello colorato mis. 8 – Extra charge for coloured ring for size 8	0,88
Costo extra per anello colorato mis. 12 – Extra charge for coloured ring for size 12	1,88

PC1503 INNESTO RAPIDO CON PORTA-GOMMA STANDARD STANDARD HOSE STEM SOCKET

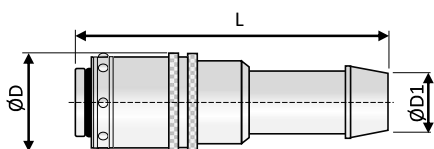


Codice-Code	MISURA SIZE	ØD	ØD1	L
-------------	----------------	----	-----	---

Senza valvola - without valve

PC1503-06-06-N	6	17	6 - 1/4"	55
PC1503-06-08-N	6	17	8 - 5/16"	55
PC1503-08-06-N	8	20	6 - 1/4"	66
PC1503-08-08-N	8	20	8 - 5/16"	66
PC1503-08-10-N	8	20	10 - 3/8"	66
PC1503-08-12-N	8	20	12 -	66
PC1503-08-13-N	8	20	13 - 1/2"	66
PC1503-12-13-N	12	28	13 - 1/2"	78
PC1503-12-16-N	12	28	16 - 5/8"	78

PC1507 INNESTO RAPIDO CON PORTA-GOMMA STANDARD 45° 45° STANDARD HOSE STEM SOCKET

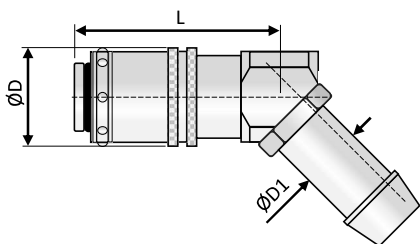


Codice-Code	MISURA SIZE	ØD	ØD1	L
-------------	----------------	----	-----	---

Senza valvola - without valve

PC1507-08-06-N	8	20	6 - 1/4"	47,5
PC1507-08-08-N	8	20	8 - 5/16"	47,5
PC1507-08-10-N	8	20	10 - 3/8"	47,5
PC1507-08-12-N	8	20	12 -	47,5
PC1507-08-13-N	8	20	13 - 1/2"	47,5
PC1507-12-13-N	12	28	13 - 1/2"	54
PC1507-12-16-N	12	28	16 - 5/8"	54

PC1511 INNESTO RAPIDO CON PORTA-GOMMA STANDARD 90° WITH 90° STANDARD HOSE STEM SOCKET

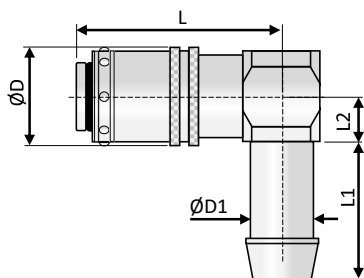

Codice-Code	MISURA SIZE	ØD	ØD1	L
-------------	----------------	----	-----	---

Senza valvola - without valve

PC1511-08-06-N	8	20	6 - 1/4"	45,5
PC1511-08-08-N	8	20	8 - 5/16"	45,5
PC1511-08-10-N	8	20	10 - 3/8"	45,5
PC1511-08-12-N	8	20	12 -	45,5
PC1511-08-13-N	8	20	13 - 1/2"	45,5
PC1511-12-13-N	12	28	13 - 1/2"	54
PC1511-12-16-N	12	28	16 - 5/8"	54