



PC1700


Innesti rapidi standard Italiano, intercambiabili con altri marchi con la stessa denominazione o profilo.

Italian Standard Quick couplings, Fully interchangeable with other brands with the same plug profile.

CARATTERISTICHE DI FUNZIONAMENTO – TECHNICAL FEATURES

Range di temperatura di esercizio:	acqua non pressurizzata\olio diatermico -20\+120°C
Pressione max. di esercizio:	18 Bar
Working temperature range:	water\diathermic oil -20°\+120°C with FKM seals (standard)
Max. working pressure:	18 Bar

Diametri e passaggio flusso:
Size and flow size:



CARATTERISTICHE COSTRUTTIVE – CONSTRUCTION FEATURES

Corpo – Socket Body	Ottone nichelato – Nickel plated brass
Ghiera – Sleeve	Ottone nichelato – Nickel plated brass
Valvola – Valve	Ottone nichelato – Nickel plated brass
Molle – Springs	Acciaio Inox Aisi 302 – Stainless Steel
Sfere – Balls	Acciaio Inox – Stainless Steel
Nipplo – Nipple	Ottone – Brass
O-Rings	FKM


OPTIONALS

Con valvola di ritegno – With shut-off Valve
Senza valvola – Without valve

Y
X

PC1719-12-G014-BYNV

PC1719 INNESTO RAPIDO CON FILETTO FEMMINA BSPP
BSPP FEMALE THREAD SOCKET

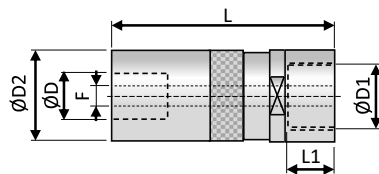

Codice-Code	CH	F	D1	D2	L	L1	L2
-------------	----	---	----	----	---	----	----


Senza valvola - without valve

PC1719-05-G018-BXNV	16	5	G1/8"	19	45	7	-
PC1719-08-G014-BXNV	21	8	G1/4"	25	56	8	-

Con valvola - with valve

PC1719-05-G018-BYNV	16	5	G1/8"	19	45	7	-
PC1719-08-G014-BYNV	21	8	G1/4"	25	56	8	-

PC1718 NIPPLO FILETTO MASCHIO BSPP CON O-RING
BSPP MALE THREAD PLUG WITH O-RING




Codice-Code	CH	F	D1	D2	L	L1	L2
-------------	----	---	----	----	---	----	----

Senza valvola - without valve

PC1718-05-G018	13	5	G1/8"	15	28,5	6	-
PC1718-08-G014	14	8	G1/4"	18	37	8	-

PC1730 NIPPLO FILETTO FEMMINA BSPP
BSPP FEMALE THREAD PLUG




Codice-Code	CH	F	D1	D2	L	L1	L2
-------------	----	---	----	----	---	----	----

Senza valvola - without valve

PC1730-05-G018	-	5	G1/8"	14	28	7	-
PC1730-08-G014	-	8	G1/4"	17	37,5	8	-

PC1738 PROLUNGA FILETTO MESHIO-FEMMINA BSPP
BSPP MALE-FEMALE EXTENSION PLUG

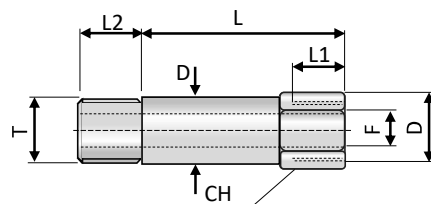

Codice-Code	CH	F	D1	D2	L	L1	L2
-------------	----	---	----	----	---	----	----

PC1738-05-G018-L022	14	5	G1/8"	-	22	8	6
PC1738-05-G018-L042	14	5	G1/8"	-	42	8	6
PC1738-05-G018-L051	14	5	G1/8"	-	51	8	6
PC1738-08-G014-L035	17	8	G1/4"	-	35	11	8
PC1738-08-G014-L051	17	8	G1/4"	-	51	11	8