



PH1230 INNESTO RAPIDO FEMMINA ISO 16028 ISO 16028 FEMALE QUICK COUPLING

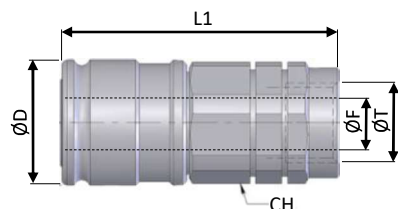


Codice-Code	misura size	CH	D	F	L	L1	ØT	max Bar
PH1230-04-G014	6,3 - 1/4"	24	28	6,3	108	63	G1/4"	400
PH1230-06-G038	10 - 3/8"	30	32	10	122	69	G3/8"	350
PH1230-06-G012	10 - 3/8"	30	32	10	122	69	G1/2"	350
PH1230-08-G012	12,5 - 1/2"	36	38	12,5	136	82	G1/2"	350
PH1230-08-G034	12,5 - 1/2"	36	38	12,5	136	82	G3/4"	350
PH1230-12-G034	16 - 5/8"	38	42	16	142	90	G3/4"	330
PH1230-16-G034	19 - 3/4"	46	48	19	158	98	G3/4"	330
PH1230-16-G100	19 - 3/4"	46	48	19	158	98	G1"	330
PH1230-20-G114	25 - 1"	55	55	25	180	144	G1 1/4"	300

DISPONIBILI CON O-RINGS FKM – AVAILABLE WITH FKM O-RINGS




PH1231 INNESTO RAPIDO MASCHIO ISO 16028 ISO 16028 MALE QUICK COUPLING

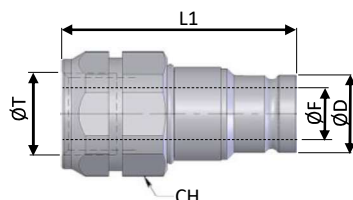


Codice-Code	misura size	CH	D	F	L	L1	ØT	max Bar
PH1231-04-G014	6,3 - 1/4"	22	16,1	6,3	108	57	G1/4"	400
PH1231-06-G038	10 - 3/8"	24	19,7	10	122	68	G3/8"	350
PH1231-06-G012	10 - 3/8"	27	19,7	10	122	68	G1/2"	350
PH1231-08-G012	12,5 - 1/2"	32	24,5	12,5	136	70	G1/2"	350
PH1231-08-G034	12,5 - 1/2"	36	24,5	12,5	136	70	G3/4"	350
PH1231-12-G034	16 - 5/8"	36	27	16	142	70	G3/4"	330
PH1231-16-G034	19 - 3/4"	41	30	19	158	83	G3/4"	330
PH1231-16-G100	19 - 3/4"	36	30	19	158	83	G1"	330
PH1231-20-G114	25 - 1"	55	36	25	180	90	G1 1/4"	300

DISPONIBILI CON O-RINGS FKM – AVAILABLE WITH FKM O-RINGS


PH1210 INNESTO RAPIDO FEMMINA ISO 7241-A ISO 7241-A FEMALE QUICK COUPLING

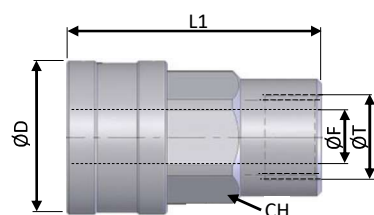

Codice-Code	misura size	CH	D	F	L	L1	ØT	max Bar
PH1210-04-G014	6,3 - 1/4"	19	25	6	68	47	G1/4"	350
PH1210-06-G038	10 - 3/8"	24	31	10	80	58	G3/8"	315
PH1210-08-G012	12,5 - 1/2"	30	38	12	91	67	G1/2"	250
PH1210-12-G034	20 - 3/4"	38	46	20	109	81	G3/4"	250
PH1210-16-G100	25 - 1"	45	55	25	124	96	G1"	230
PH1210-20-G114	32 - 1.1/4"	50	65	32	151	117	G1 1/4"	230
PH1210-24-G112	38 - 1.1/2"	60	80	38	171	123	G1 1/2"	190
PH1210-32-G200	50 - 2"	75	100	50	201	160	G2"	130



PH1211 INNESTO RAPIDO MASCHIO ISO 7241-A ISO 7241-A MALE QUICK COUPLING



Codice-Code	misura size	CH	D	F	L	L1	ØT	max Bar
PH1211-04-G014	6,3 - 1/4"	19	-	6	68	34,5	G1/4"	350
PH1211-06-G038	10 - 3/8"	22	-	10	80	39	G3/8"	315
PH1211-08-G012	12,5 - 1/2"	27	-	12	91	45	G1/2"	250
PH1211-12-G034	20 - 3/4"	34	-	20	109	54,5	G3/4"	250
PH1211 16 G100	25 - 1"	41	-	25	124	62	G1"	230
PH1211-20-G114	32 - 1.1/4"	55	-	32	151	75	G1 1/4"	230
PH1211-24-G112	38 - 1.1/2"	60	-	38	171	85	G1 1/2"	190
PH1211-32-G200	50 - 2"	75	-	50	201	100	G2"	130