



### PC2216 TAPPO IN OTTONE CON FILETTO FEMMINA BSPP BSPP FEMALE THREAD BRASS PLUG

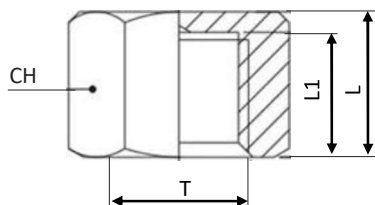


| Codice-Code | CH | ØD | L    | L1   | ØT    | max Bar |    |
|-------------|----|----|------|------|-------|---------|----|
| PC2216-M005 | 8  | -  | 7    | 5,5  | M5    | 25      | 10 |
| PC2216-G018 | 14 | -  | 11   | 9    | G1/8" | 25      | 10 |
| PC2216-G014 | 17 | -  | 13   | 11   | G1/4" | 25      | 10 |
| PC2216-G038 | 21 | -  | 13,5 | 11   | G3/8" | 25      | 10 |
| PC2216-G012 | 24 | -  | 13,5 | 11   | G1/2" | 20      | 10 |
| PC2216-G034 | 30 | -  | 15   | 12,5 | G3/4" | 20      | 5  |
| PC2216-G100 | 38 | -  | 15   | 12,5 | G1"   | 15      | 5  |

### PC2251 TAPPO CHIUSURA A SFERA BALL SEALING PLUG

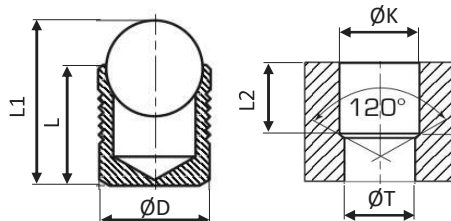


| Codice-Code | ØD | ØK | L   | L1   | L2    | ØT   | max |  |
|-------------|----|----|-----|------|-------|------|-----|--|
| PC2251-03   | 3  | 3  | 3,6 | 4,6  | 3,4   | 2,2  | 100 |  |
| PC2251-04   | 4  | 4  | 4   | 5,2  | 3,8   | 3,3  | 100 |  |
| PC2251-05   | 5  | 5  | 5,5 | 7,1  | 5,3   | 4,3  | 100 |  |
| PC2251-06   | 6  | 6  | 6,5 | 8,6  | 6,3   | 5,3  | 100 |  |
| PC2251-07   | 7  | 7  | 7,5 | 10,1 | 7,3   | 6,4  | 100 |  |
| PC2251-08   | 8  | 8  | 8,5 | 11,6 | 8,3   | 7,4  | 100 |  |
| PC2251-09   | 9  | 9  | 10  | 13,6 | 9,8   | 8,4  | 50  |  |
| PC2251-10   | 10 | 10 | 11  | 15,1 | 10,8  | 9,4  | 50  |  |
| PC2251-12   | 12 | 12 | 13  | 17,9 | 12,8  | 10,6 | 50  |  |
| PC2251-14   | 14 | 14 | 15  | 20,6 | 14,5  | 12,7 | 50  |  |
| PC2251-16   | 16 | 16 | 17  | 23,4 | 16,5  | 14,7 | 25  |  |
| PC2251-18   | 18 | 18 | 19  | 26,4 | 18,5  | 16,7 | 25  |  |
| PC2251-20   | 20 | 20 | 22  | 30,1 | 21,45 | 18,7 | 25  |  |
| PC2251-22   | 22 | 22 | 25  | 34   | 24,5  | 20,7 | 25  |  |

### PC2206 TAPPO IN OTTONE-ACCIAIO INOX A PRESSIONE SENZA FILETTO THREADLESS BRASS-STAINLESS STEEL PRESSURE PLUG



| Codice-Code | CH | ØD max | L    | L1 | ØT | max Bar |    |
|-------------|----|--------|------|----|----|---------|----|
| PC2206-06   | -  | 6      | 11,5 | 8  | M3 | -       | 20 |
| PC2206-08   | -  | 8      | 11,5 | 8  | M4 | -       | 20 |
| PC2206-10   | -  | 10     | 14   | 10 | M6 | -       | 20 |
| PC2206-12   | -  | 12     | 14   | 10 | M6 | -       | 15 |
| PC2206-15   | -  | 15     | 16   | 12 | M8 | -       | 10 |
| PC2206-16   | -  | 16     | 16   | 12 | M8 | -       | 10 |
| PC2206-20   | -  | 20     | 16   | 12 | M8 | -       | 10 |

### PC2250 TAPPO IN OTTONE AD ESPANSIONE CON O-RING FKM THREADLESS PRESSURE BRASS PLUG WITH FKM O-RING



| Codice-Code | CH | ØD   | L  | L1 | ØT | max Bar |    |
|-------------|----|------|----|----|----|---------|----|
| PC2250-060  | -  | 6    | 10 | -  | -  | -       | 10 |
| PC2250-070  | -  | 7    | 10 | -  | -  | -       | 10 |
| PC2250-080  | -  | 8    | 10 | -  | -  | -       | 10 |
| PC2250-085  | -  | 8,5  | 10 | -  | -  | -       | 10 |
| PC2250-100  | -  | 10   | 10 | -  | -  | -       | 10 |
| PC2250-115  | -  | 11,5 | 10 | -  | -  | -       | 10 |
| PC2250-120  | -  | 12   | 10 | -  | -  | -       | 10 |
| PC2250-140  | -  | 14   | 12 | -  | -  | -       | 10 |
| PC2250-150  | -  | 15   | 12 | -  | -  | -       | 10 |
| PC2250-160  | -  | 16   | 12 | -  | -  | -       | 10 |
| PC2250-200  | -  | 20   | 12 | -  | -  | -       | 10 |
| PC2250-220  | -  | 22   | 12 | -  | -  | -       | 10 |