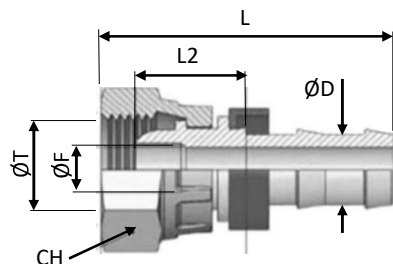
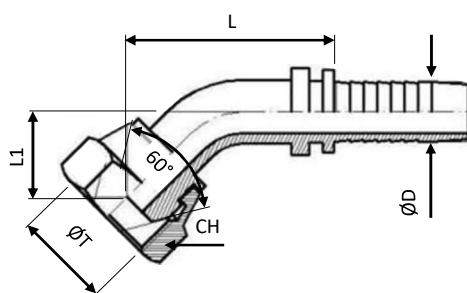


PC2233 PORTAGOMMA IN ACCIAIO ZINCATO PROFILO EASY-LOCK FIL. FEMMINA BSPP GIREVOLE
GALVANIZED STEEL EASY-LOCK HOSE TAIL WITH SWIVEL BSPP FEMALE THREAD


Codice-Code	CH	ØD tubo/hose		ØF	L	L1	L2	T	
PC2233-06-M014	19	6,3	1/8"	4	37,2	18	13,2	M14x1.5	5
PC2233-06-M016	20	9,5	3/8"	7	44,3	22	14,2	M16x1.5	5
PC2233-06-G014	19	6,3	1/8"	4	37,2	18	13,2	G1/4"	5
PC2233-10-M016	20	9,5	3/8"	7	44,3	22	14,2	M16x1.5	5
PC2233-10-M018	20	9,5	3/8"	7	44,3	22	14,2	M18x1.5	5
PC2233-10-G038	20	9,5	3/8"	7	44,3	22	14,2	G3/8"	5
PC2233-13-G012	27	12,7	1/2"	9,5	51,5	29	22,5	G1/2"	5
PC2233-13-M022	27	12,7	1/2"	9,5	51,5	29	22,5	M22x1.5	5
PC2233-16-M022	27	16	5/16"	14,5	68,2	39	22,5	M22x1.5	5
PC2233-16-M026	32	16	5/16"	14,5	68,2	39	27,6	M26x1.5	5
PC2233-19-M030	32	19,1	3/4"	14,5	68,2	39	27,6	M30x1,5	5
PC2233-19-G034	32	19,1	3/4"	14,5	68,2	39	27,6	G3/4"	5
PC2233-25-G100	41	25	1"	20	74	39	28,4	G1"	5

PH1002 PORTAGOMMA IN ACCIAIO ZINCATO 45° PER TUBI ALTA PRESSIONE FIL. FEMMINA BSPP GIREVOLE
GALVANIZED STEEL HOSE TAIL 45° WITH SWIVEL BSPP FEMALE THREAD FOR HIGH PRESSURE HOSES


Codice-Code	CH	ØD tubo/hose	F	L	L1	max bar	ØT	
PH1002-014-M012	14	1/4"	-	37	13,5	350	M12x1,5	10
PH1002-014-M014	19	1/4"	-	37,5	14	350	M14x1,5	10
PH1002-014-M016	19	1/4"	-	40,5	17,5	350	M16x1,5	10
PH1002-014-G018	14	1/4"	-	37	13,5	350	G 1/8"	10
PH1002-014-G014	19	1/4"	-	37,5	14	350	G 1/4"	10
PH1002-014-G038	22	1/4"	-	40,5	17,5	350	G 3/8"	10
PH1002-038-M016	22	3/8"	-	51,5	19	350	M16x1,5	10
PH1002-038-M018	22	3/8"	-	51,5	19	350	M18x1,5	10
PH1002-038-M020	27	3/8"	-	53,5	21	350	M20x1,5	10
PH1002-038-G014	19	3/8"	-	50	17,5	350	G 1/4"	10
PH1002-038-G038	22	3/8"	-	51,5	19	350	G 3/8"	10
PH1002-038-G012	27	3/8"	-	53,5	21	315	G1/2"	10
PH1002-012-M018	22	1/2"	-	60,5	20,5	315	M18x1,5	5
PH1002-012-M022	27	1/2"	-	61	21	315	M22x1,5	5
PH1002-012-M026	32	1/2"	-	65,5	25,5	315	M26x1,5	5
PH1002-012-G038	22	1/2"	-	60,5	20,5	350	G 3/8"	5
PH1002-012-G012	27	1/2"	-	61	21	315	G1/2"	5
PH1002-012-G034	32	1/2"	-	65,5	25,5	250	3/4"	5
PH1002-034-M026	32	3/4"	-	81	26	250	M26x1,5	1
PH1002-034-G034	32	3/4"	-	81	26	250	3/4"	1
PH1002-034-G100	41	3/4"	-	83,5	28,5	200	1"	1
PH1002-100-G100	41	1"	-	99,5	29	200	1"	1

Raccordatura raccomandata -
recommended clamping - p. 136
