


R0721

Golfare girevole H.T. - 807X HT
Rotating eye bolt H.T. - 807X HT

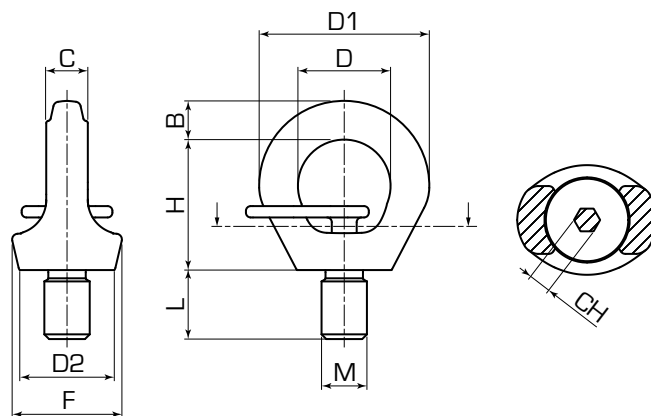

CARTEC100

Descrizione:

Nota: il dispositivo non è idoneo alla rotazione sotto carico

Description:

Note: the device is not suitable for rotation during loading

Codice Code	WLL (t)	M x L	Coppia Max. serraggio Max tightening Torque (Nm)	Peso Weight (Kg)	Dimensioni Dimensions (mm)							
					H	B	C	D	D2	F	D1	CH
R0721-20-0001	0.3	M8 x 12	8	0.12	33.7	10	9.8	25	25.5	30	46	6
R0721-20-0002	0.4	M10 x 15	16	0.12	33.7	10	9.8	25	25.5	30	46	6
R0721-20-0003	0.75	M12 x 18	25	0.2	41.5	12.5	11.5	30	30.6	36.5	55.5	8
R0721-20-0004	0.75	M14 x 18	30	0.2	41.5	12.5	11.5	30	30.6	36.5	55.5	8
R0721-20-0005	1.5	M16 x 24	60	0.35	49.5	14.5	15.7	35	36.5	42	64.5	10
R0721-20-0006	1.5	M18 x 24	70	0.35	49.5	14.5	15.7	35	36.5	42	64.5	10
R0721-20-0007	2.3	M20 x 30	110	0.6	58	16	18	40	42	52.5	74.5	12
R0721-20-0008	2.3	M22 x 30	120	0.6	58	16	18	40	42	52.5	74.5	12
R0721-20-0009	3.2	M24 x 36	195	1	69	20.5	22	49	50	61	90	12
R0721-20-0010	3.2	M27 x 36	240	1	69	20.5	22	49	50	61	90	12
R0721-20-0011	4.5	M30 x 45	320	2	86	25.5	28	60	66	75	111	17
R0721-20-0012	4.5	M33 x 45	350	2	86	25.5	28	60	66	75	111	17
R0721-20-0013	7	M36 x 55	585	3.4	105	32	30	74	77	96.5	135	22
R0721-20-0014	9	M42 x 65	920	5.7	118	38	37	82	87	110	158	24
R0721-20-0015	12	M48 x 72	1590	8.5	137	43	38	95	102	124.5	180	27

Punto di ancoraggio destinato al sollevamento dei carichi.


- Coefficiente di sicurezza 4 in tutte le direzioni di carico
- Progettato, testato e certificato secondo norme tecniche GS-QA15-04 - EN 1677
- Idoneo al sollevamento in sicurezza secondo direttiva macchine 2006/42/EC
- Orientabile a 360°
- Testato 100 % magnaflux
- Testato a 20.000 cicli di fatica
- Ideali per ancoraggi a 90°
- Vite imperdibile
- Sul tiro assiale è consentito uno scostamento di +/-5° con una riduzione della portata del 10 %

Anchorage point for load lifting.

- Safety coefficient 4 in all loading directions
- Designed, tested and certified in compliance with the technical directives GS-QA15-04 - EN 1677
- Suitable for safe lifting in compliance with the machinery directive 2006/42/EC
- Can be oriented at 360°
- Tested at 100 % magnaflux
- Tested at 20.000 stress cycles
- Ideal for fastening at 90°
- Captive screws
- On the axial pull there can be variation of +/-5° with a 10% decrease in capacity

R0721

Golfare girevole H.T. - 807X HT
Rotating eye bolt H.T. - 807X HT



CARTEC100

	Numero di bracci Number of legs	Direzione di Carico Load direction	Cod. R0721-20-	0001	0002	0003	0004	0005	0006	0007	0008	0009	0010	0011	0012	0013	0014	0015
			M x L	M8 x 12	M10 x 15	M12 x 18	M14 x 18	M16 x 24	M18 x 24	M20 x 30	M22 x 30	M24 x 36	M27 x 36	M30 x 45	M33 x 45	M36 x 55	M42 x 65	M48 x 72
	1	0°		1	1	2	2	4	4	6	6	8	8	12	12	16	24	32
	2	0°		2	2	4	4	8	8	12	12	16	16	24	24	32	45	64
	1	90°		0.3	0.4	0.75	0.75	1.5	1.5	2.3	2.3	3.2	3.2	4.5	4.5	7	9	12
	2	90°		0.6	0.8	1.5	1.5	3	3	4.6	4.6	6.4	6.4	9	9	14	18	24
	2	0 - 45°		0.42	0.56	1	1	2	2	3.22	3.22	4.48	4.48	6.3	6.3	9.8	12.6	16.8
	2	45° - 60°		0.3	0.4	0.75	0.75	1.5	1.5	2.3	2.3	3.2	3.2	4.5	4.5	7	9	12
	2	assimm. asymm.		0.3	0.4	0.75	0.75	1.5	1.5	2.3	2.3	3.2	3.2	4.5	4.5	7	9	12
	3 - 4	0° - 45°		0.63	0.84	1.6	1.6	3.15	3.15	4.83	4.83	6.7	6.7	9.4	9.4	14.7	18.9	25.2
	3 - 4	45° - 60°		0.45	0.6	1.12	1.12	2.25	2.25	3.45	3.45	4.8	4.8	6.7	6.7	10.5	13.5	18
	3 - 4	assimm. asymm.		0.3	0.4	0.75	0.75	1.5	1.5	2.3	2.3	3.2	3.2	4.5	4.5	7	9	12