


R0724

Golfare maschio 8.8 - 803
Eye bolt 8.8 - 803

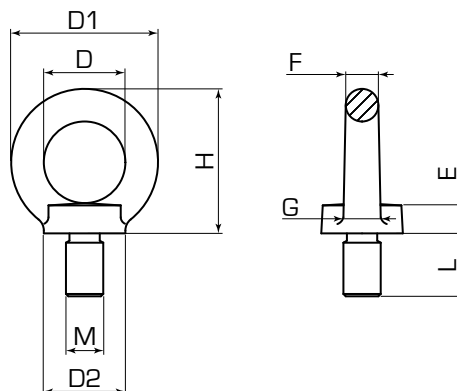

CARTEC80

Descrizione:

Coefficiente di sicurezza: 4
Nota: avvitare a mano


Description:

Safety ratio: 4
Note: to be screwed by hand

Codice Code	WLL (t)	M x L	Coppia Max. serraggio Max tightening Torque (Nm)	Peso Weight (Kg)	Dimensioni Dimensions (mm)					
					D	D1	D2	E	F	H
R0724-20-0001	0.4	M6 x 13	3.5	0.09	25	45	25	10	10	45
R0724-20-0002	0.8	M8 x 13	8	0.09	25	45	25	10	10	45
R0724-20-0003	1	M10 x 17	16	0.11	25	45	25	10	10	45
R0724-20-0004	1.6	M12 x 21	28	0.27	35	63	35	14	14	62
R0724-20-0005	3	M14 x 21	45	0.29	35	63	35	14	14	62
R0724-20-0006	4	M16 x 27	70	0.31	35	63	35	14	14	62
R0724-20-0007	5	M18 x 27	95	0.84	50	90	50	20	20	90
R0724-20-0008	6	M20 x 30	135	0.86	50	90	50	20	20	90
R0724-20-0009	7	M22 x 36	182	0.9	50	90	50	20	20	90
R0724-20-0010	8	M24 x 36	230	0.9	50	90	50	20	20	90
R0724-20-0011	10	M27 x 45	343	1.66	60	108	65	24	24	109
R0724-20-0012	12	M30 x 45	465	1.7	60	108	65	24	24	109
R0724-20-0013	14	M33 x 54	632	2	70	126	75	26	28	128
R0724-20-0014	16	M36 x 54	814	2.15	70	126	75	26	28	128
R0724-20-0015	24	M42 x 63	1304	4.15	80	144	85	30	32	147
R0724-20-0016	32	M48 x 68	1981	6.2	90	166	100	35	38	168
R0724-20-0017	36	M56 x 78	3000	8.8	100	184	110	38	42	187
R0724-20-0018	45	M64 x 90	4736	12.4	110	206	120	42	48	208

R0724

Golfare maschio 8.8 - 803
Eye bolt 8.8 - 803

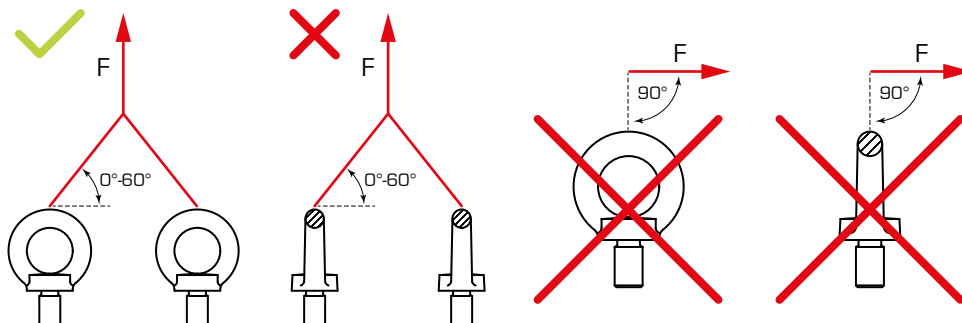

CARTEC80

	Numero di bracci Number of legs	Direzione di Carico Load direction	Cod. R0724-20-	0001	0002	0003	0004	0005	0006	0007	0008	0009	0010	0011	0012	0013	0014	0015	0016	0017	0018
			M x L	M6 x 13	M8 x 13	M10 x 17	M12 x 21	M14 x 21	M16 x 27	M18 x 27	M20 x 30	M22 x 36	M24 x 36	M27 x 45	M30 x 45	M33 x 54	M36 x 54	M42 x 63	M48 x 68	M56 x 78	M64 x 90
	1	0°		0.4	0.8	1	1.6	3	4	5	6	7	8	10	12	14	16	24	32	36	45
	2	0°		0.8	1.6	2	3.2	6	8	10	12	14	16	20	24	28	32	48	64	72	90
	2	0° - 45°		0.14	0.28	0.35	0.56	1	1.4	1.8	2.1	2.4	2.8	3.5	4.2	4.8	5.6	8.4	11.2	12.6	15.7
	2	45° - 60°		0.1	0.2	0.25	0.4	0.75	1	1.25	1.5	1.75	2	2.5	3	3.4	3.9	5.9	7.8	8.8	11
	3 - 4	0° - 45°		0.2	0.4	0.5	0.8	1.5	2	2.5	3	3.5	4	5	6	6.8	7.8	11.8	15.6	17.6	22
	3 - 4	45° - 60°		0.14	0.28	0.35	0.56	1	1.4	1.8	2.1	2.4	2.8	3.5	4.2	4.8	5.4	8.2	10.9	12.3	15.7