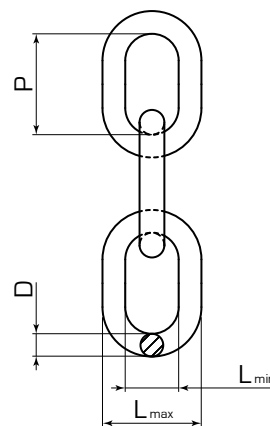


R0729

Catena grado 100 - C8182X
Chain grade 100 - C8182X



CARTEC100

Descrizione:

Esempio di ordinativo: Codice x Lunghezza catena




Description:

Example of purchasing order: Code x Chain length

Codice Code	D		WLL (t)	P	L min	L max	M.P.F. (KN)	B.F. (KN)	Peso Weight (Kg/m)	Freccia di flessione Bend deflection (mm)
	mm	inch								
R0729-20-0001	6	1/4	1.4	18	7.8	22.2	35.3	56.5	0.9	4.8
R0729-20-0002	7	9/32	1.9	21	9.1	25.9	48.1	77	1.2	5.6
R0729-20-0003	8	5/16	2.5	24	10.4	29.6	62.8	101	1.6	6.4
R0729-20-0004	10	3/8	4	30	13	37	98.2	157	2.5	8
R0729-20-0005	13	1/2	6.7	39	16.9	48.1	166	265	4.2	10
R0729-20-0006	16	5/8	10	48	20.8	59.2	251	402	6.2	13
R0729-20-0007	20	3/4	16	60	26	74	393	628	10	16
R0729-20-0008	22	7/8	19	66	28.6	81.4	475	760	11.9	18
R0729-20-0009	26	1	26.5	78	33.8	96.2	664	1060	16.3	21
R0729-20-0010	32	1 1/4	40	96	41.6	118	981	1570	24.3	26

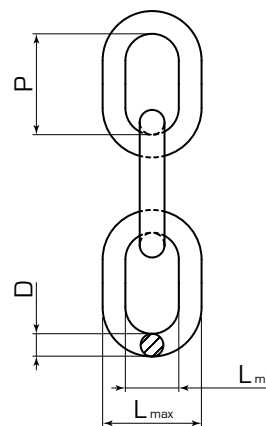
Impiego della catena su spigolo

Use of the chain on the edge

			
	$R \geq 2 \times D$	$R \geq D$	Spigolo vivo Sharp edge
Fattore di riduzione Reduction factor	1	0.7	0.5
Carico impulsivo Impulsive load	Leggera pulsazione Light impulse	Media pulsazione Medium impulse	Forte pulsazione Strong impulse
Fattore di riduzione Reduction factor	1	0.7	Non consentito Not allowed

R0729

Catena grado 100 - C8182X
Chain grade 100 - C8182X



CARTEC100

	Tipo Imbraghe Slings type	Fattore di Carico Load factor	Direzione di Carico Load direction	Cod. R0729-20-	0001	0002	0003	0004	0005	0006	0007	0008	0009	0010
				D mm	6	7	8	10	13	16	20	22	26	32
	1 braccio 1 leg	1	0°		1.4	1.9	2.5	4	6.7	10	16	19	26.5	40
	1 braccio 1 leg	0.8	0°		1.12	1.5	2	3.15	5.3	8	12.8	15	21.2	31.5
	2 bracci 2 legs	1.4	0° - 45°		2	2.65	3.55	5.6	9.5	14	22.4	26.5	37.1	56
	2 bracci 2 legs	1	45° - 60°		1.4	1.9	2.5	4	6.7	10	16	19	26.5	40
	2 bracci 2 legs	1.12	0° - 45°		1.6	2.12	2.8	4.25	7.5	11.2	17.92	21.2	29.68	44.8
	2 bracci 2 legs	0.8	45° - 60°		1.12	1.5	2	3.15	5.3	8	12.8	15	21.2	31.5
	3 - 4 bracci 3 - 4 legs	2.1	0° - 45°		3	4	5.3	8.4	14	21.2	33.6	40	55.65	85
	3 - 4 bracci 3 - 4 legs	1.5	45° - 60°		2.12	2.8	3.75	6	10	15	24	28	39.75	60
	Anello Masterlink	1.6	0°		2.24	3	4	6.3	10.6	16	25.6	30	42.4	64
	Brache a cesto Legged slings	1.4	0° - 45°		2	2.65	3.55	5.6	9.5	14	22.4	26.5	37.1	56
	Brache a cesto Legged slings	2.1	0° - 45°		3	4	5.3	8	14	21.2	33.6	40	55.65	85