


R0730

Braca ad asola in poliestere - C41
Polyester eyesling - C41

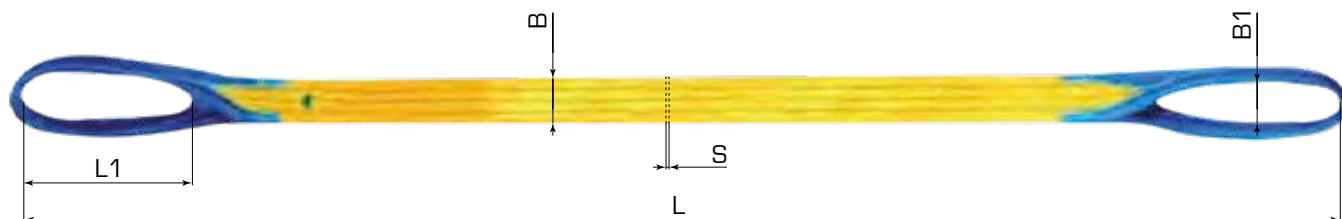

Descrizione:

Materiale: Poliestere
Esempio di ordinativo: R0730-20-0001

Description:

Material: Polyester
Example of purchasing order: R0730-20-0001

Codice Code	WLL (t)		B (mm)	S (mm)	B1 (mm)	L1 (mm)	L (m)												
	singola singola	a cesto basket					0.5	1	1.5	2	2.5	3	4	5	6	7	8	10	12
R0730-20-	1	2	30	7	15	200	0001	0002	0003	0004	0005	0006	0007	0008	0009		0010	0011	0012
R0730-20-	1	2	50	7	15	200	0013	0014	0015	0016	0017	0018	0019	0020	0021				
R0730-20-	2	4	60	7	30	300		0022	0023	0024	0025	0026	0027	0028	0029		0030	0031	0032
R0730-20-	3	6	90	7	30	350		0033	0034	0035	0036	0037	0038	0039	0040		0041	0042	0043
R0730-20-	4	8	120	7	40	425		0044	0045	0046	0047	0048	0049	0050	0051		0052	0053	0054
R0730-20-	5	10	150	7	50	500		0055	0056	0057	0058	0059	0060	0061	0062		0063	0064	0065
R0730-20-	6	12	180	7	60	550				0066		0067	0068	0069	0070		0071	0072	0073
R0730-20-	8	16	240	7	80	600				0074		0075	0076	0077	0078	0079	0080	0081	0082
R0730-20-	10	20	300	10	100	750				0083		0084	0085	0086	0087		0088	0089	0090

Brache ad asola di alta qualità per sollevamento, in poliestere PES, compattate nella forma, tessute e protette con basso allungamento.

High quality eyeslings for lifting purpose, made of woven PES, form-stabilized, drawn and finished, with low elongation.

- Prodotte in conformità a DIN EN 1492-1
- Fattore di sicurezza 7
- Codice colore in base agli standard europei
- Direttiva macchina EU CE 89392 CEE II A

- Produced according to DIN EN 1492-1
- Safety factor 7
- Color-Code according to European standard
- EU- machine directive CE 89392 CEE II A

R0730

Braca ad asola in poliestere - C41
Polyester eyesling - C41



	Tipo Imbraghe Slings type	Direzione di Carico Load direction	WLL (t)							
			1	2	3	4	5	6	8	10
	1 braccio 1 leg	0°	1	2	3	4	5	6	8	10
	Anello Masterlink	0°	0.8	1.6	2.4	3.2	4	4.8	6.4	8
	Brache a cesto Legged slings	≤ 6°	2	4	6	8	10	12	16	20
	Brache a cesto Legged slings	0° - 45°	1.4	2.8	4.2	5.6	7	8.4	11.2	14
	Brache a cesto Legged slings	45° - 60°	1	2	3	4	5	6	8	10
	2 bracci 2 legs	0° - 45°	1.4	2.8	4.2	5.6	7	8.4	11.2	14
	2 bracci 2 legs	45° - 60°	1	2	3	4	5	6	8	10
	2 bracci ad anello 2 legged masterlink	0° - 45°	1.12	2.24	3.36	4.48	5.6	6.72	8.96	11.2
	2 bracci ad anello 2 legged masterlink	45° - 60°	0.8	1.6	2.4	3.2	4	4.8	6.4	8