



PH1240 INNESTO RAPIDO OLEODINAMICO FEMMINA ALTA PRESSIONE AISI 303 E GHIERA ALLUMINIO ANODIZZATO HIGH PRESSURE HYDRAULIC QUICK COUPLING WITH STAINLESS STEEL CONSTRUCTION AND ALUMINIUM SLEEVE

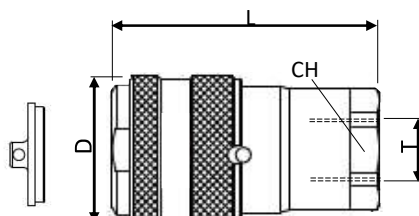

Codice-Code	CH	ØD	F	L	T	max l/min	max Bar connesso connected	max Bar disconnesso disconnected	Cod tappo-plug
PH1240-07-G038-B	25	31,5	8	58	G3/8"	15	500	180	PH1240-07-P
PH1240-07-G038-R	25	31,5	8	58	G3/8"	15	500		PH1240-07-P
PH1240-08-G012-B	30	40	10	72	G1/2"	30	450		PH1240-08-P
PH1240-08-G012-R	30	40	10	72	G1/2"	30	450		PH1240-08-P
PH1240-11-G012-B	30	40	11	72	G1/2"	50	450		PH1240-08-P
PH1240-11-G012-R	30	40	11	72	G1/2"	50	450		PH1240-08-P
PH1240-12-G034-B	41	50	12	89	G3/4"	80	400		PH1240-12-P
PH1240-12-G034-R	41	50	12	89	G3/4"	80	400		PH1240-12-P

PH1241 INNESTO RAPIDO OLEODINAMICO MASCHIO ALTA PRESSIONE AISI 303 HIGH PRESSURE HYDRAULIC QUICK PLUG WITH STAINLESS STEEL CONSTRUCTION

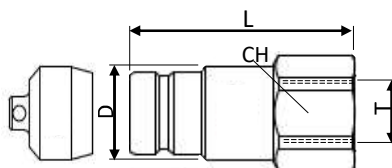

Codice-Code	CH	ØD	F	L	T	max l/min	max Bar connesso connected	max Bar disconnesso disconnected	Cod tappo-plug
PH1241-07-G038	22	21,5	8	49	G3/8"	15	500	180	PH1241-07-P
PH1241-08-G012	30	32,5	10	63	G1/2"	30	450		PH1241-08-P
PH1241-11-G012	30	32,5	11	63	G1/2"	50	450		PH1241-08-P
PH1241-12-G034	41	44,5	12	74	G3/4"	80	400		PH1241-12-P