


R0725

Golfare femmina DIN582 - 56
Eye nut DIN582 - 56

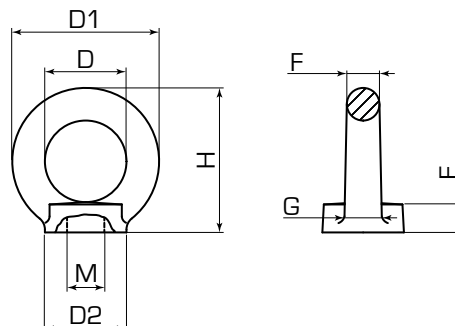

Descrizione:

Materiale: Acciaio C15 E / DIN582

Description:

Material: Steel C15 E / DIN582

Codice Code	M	Coppia Max. serraggio Max tightening Torque (Nm)	WLL (t) ⊥	WLL (t) X	WLL (t) +	Peso Weight (Kg)	Dimensioni Dimensions (mm)						
							D	D1	D2	E	F	G	H
R0725-20-0001	M6	3.5	0.09	0.06	0.045	0.05	20	36	20	8.5	8	10	36
R0725-20-0002	M6	3.5	0.75	0.055	0.038	0.05	20	36	20	8.5	8	10	36
R0725-20-0003	M8	8	0.14	0.1	0.07	0.05	20	36	20	8.5	8	10	36
R0725-20-0004	M10	16	0.23	0.17	0.115	0.09	25	45	25	10	10	12	45
R0725-20-0005	M12	28	0.34	0.24	0.17	0.16	30	54	30	11	12	14	53
R0725-20-0006	M14	45	0.5	0.35	0.25	0.15	30	54	30	11	12	14	53
R0725-20-0007	M14	45	0.49	0.35	0.245	0.25	35	63	35	13	14	16	62
R0725-20-0008	M16	70	0.7	0.5	0.35	0.24	35	63	35	13	14	16	62
R0725-20-0009	M18	95	0.93	0.65	0.465	0.23	35	63	35	13	14	16	62
R0725-20-0010	M18	95	0.85	0.6	0.425	0.37	40	72	40	16	16	19	71
R0725-20-0011	M20	135	1.2	0.86	0.6	0.36	40	72	40	16	16	19	71
R0725-20-0012	M22	182	1.5	1.05	0.75	0.35	40	72	40	16	16	19	71
R0725-20-0013	M22	182	1.4	1	0.7	0.73	50	90	50	20	20	24	90
R0725-20-0014	M24	230	1.8	1.29	0.9	0.72	50	90	50	20	20	24	90
R0725-20-0015	M27	343	2.5	1.83	1.25	0.8	54	98	62	22	22	26	99
R0725-20-0016	M27	343	2.1	1.5	1.05	1.34	60	108	65	25	24	28	109
R0725-20-0017	M30	465	3.2	2.3	1.6	1.32	60	108	65	25	24	28	109
R0725-20-0018	M33	632	4.2	3.05	2.1	1.27	60	108	65	25	24	28	109
R0725-20-0019	M33	632	3.2	2.3	1.6	2.11	70	126	75	30	28	32	128
R0725-20-0020	M36	814	4.6	3.3	2.3	2.08	70	126	75	30	28	32	128
R0725-20-0021	M39	1059	6	4.4	3	3.15	80	144	85	35	32	38	147
R0725-20-0022	M39	1059	4.6	3.3	2.3	3.15	80	144	85	35	32	38	147
R0725-20-0023	M42	1304	6.3	4.5	3.15	3.11	80	144	85	35	32	38	147
R0725-20-0024	M45	1638	7.8	5.5	3.9	5.08	90	166	100	40	38	46	168
R0725-20-0025	M45	1638	6.3	4.5	3.15	5.08	90	166	100	40	38	46	168
R0725-20-0026	M48	1981	8.6	6.1	4.3	5.02	90	166	100	40	38	46	168
R0725-20-0027	M52	2540	9.9	7.1	4.95	6.79	100	184	110	45	42	50	187
R0725-20-0028	M52	2540	8.6	6.1	4.3	6.79	100	184	110	45	42	50	187
R0725-20-0029	M56	3000	11.5	8.2	5.75	6.69	100	184	110	45	42	50	187
R0725-20-0030	M60	3000	11.5	8.2	5.75	9.43	110	206	120	50	48	58	208
R0725-20-0031	M64	4736	16	11	8	9.3	110	206	120	50	48	58	208
R0725-20-0032	M72	6913	20	14	10	18.5	140	260	150	60	60	72	260